


# Bijlage: Standaard Holle-wandelementen




Datum: 24 april 2009


Wandafm. (mm)	Afmetingen (mm)			Dekking (mm)		afstortselheid mtr/uur
	binnenschil	I.H.W. te storten	buitenschil	binnenschil	buitenschil	
[a]	[b]	[c]	[d]			
180	45	80	55	20	20	< 0,50
200	55	80	65	30	30	< 0,50
200	55	80	65	20	20	< 0,80
220	55	100	65	20	20	< 0,80
240	60	110	70	30	30	< 0,80
240	55	120	65	20	20	< 0,80
250	70	110	70	40	30	< 0,80
250	60	130	60	30	20	< 0,80
250	55	125	70	20	30	< 0,80
300	60	170	70	30	30	< 0,80
300	60	180	60	30	20	< 0,80
300	55	175	70	20	30	< 0,80
350	60	220	70	30	30	< 0,80
365	55	245	65	20	30	< 0,80
365	55	245	65	20	20	< 0,80
375	60	250	65	30	30	< 0,80
400	70	260	70	40	30	< 0,80

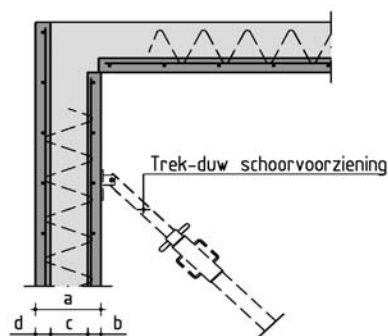


Detail V1 - principedetail holle-wand

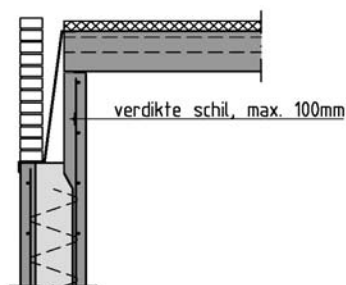


Detail V2 - principedetail verdikte schil

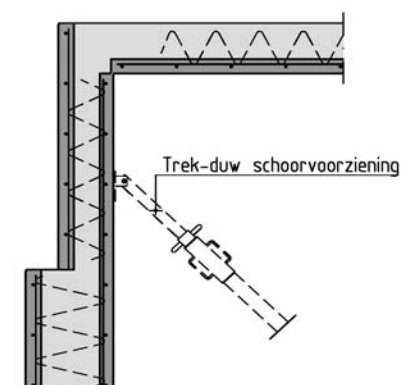


Detail V3 - principedetail wandverjonging

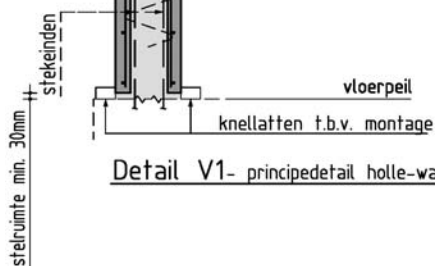

Detail H1 - principedetail hoek

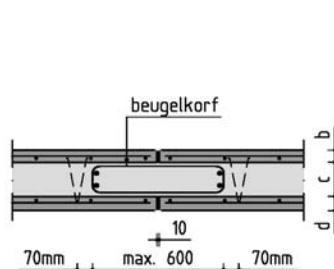

Detail H2 - principedetail plaatvoeg

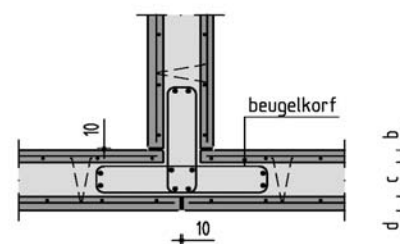

Detail H3 - principedetail T-hoek